KRAFTWERK®


FAVORITE TOOLS SINCE 1979


EN


Instruction Manual


LED work lamp 5000, replaceable battery, 5 colour temperatur


702.006.500





















IMPORTANT! RETAIN FOR FUTURE REFERENCE: READ CAREFULLY!

TECHNICAL SPECIFICATIONS:

Model	**702.006.500**
Protection class	**III**
Protection degree	**IP65/IK10**
Optional adaptor input	100-240 V~ 50 / 60 Hz
Optional adaptor output	**20 V ⎓ 1.1A**
Illuminant	**50W SMD LED**
Luminous flux	**5000lm(50W) ,2500m(25W), 1500lm(15W),500lm(5W)**
Kelvin	**2700K , 3500K ,4500K , 5500K , 6500K**
Charging time	**4 h**
Operating time	**2.0h(50W),4.0h(25W),6.0h(15W),18h(5W)**
Battery	**Li-ion 14.8 V ⎓ 5200 mAh**
Operating temperature	-10°C ~ +40°C
Dimensions L/W/H	**280 x 280x 148 mm**
Net weight	**2600 g**

PROPER INTENDED USE

The handlamp is suitable for indoor and outdoor lighting applications.

WARNING / CHARGING INSTRUCTION / BATTERY TIPS


- Avoid looking directly into the beam of light, as this will result in dazzling
- Do not use the lamp near a naked flame
- Before using the lamp for the first time, the battery must be fully charged
- Please use the charger equipped with the lamp
- Please do not use a modified or damaged charger
- Recharge frequently
- Please do not leave the lamp be in charging over 24 hours
- Always replace the battery with an original battery
- Do not leave the battery without charge for an extended period
- Deep discharge risks damaging the battery
- The light source of this lamp is not replaceable; when the light source reaches its end of life the whole lamp shall be replaced

CLEANING

Do not use solvents, corrosive cleaners or the like. Use a dry or slightly moist cloth for cleaning ONLY.

Battery and Adapter replacement

- Ensure the work light is switched off.
- Remove the battery casing by releasing the two latches.
- Press the release button of the battery inward (See Point 1)
- Slide the battery out of the housing.
- Press the release button for the adapter inward (See Point 2)
- Slide the adapter out of the housing.
- To change the battery and adapter together, press the release button for the adapter (See point 3) and slide the adapter and battery together out of the housing.

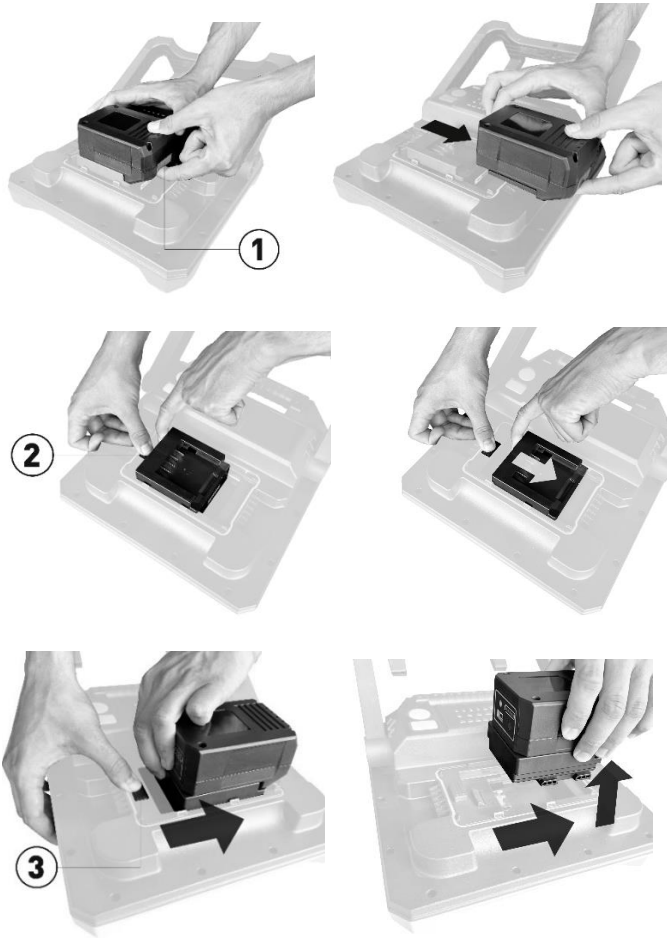

Battery Adapter-System

Your KRAFTWERK work light features an innovative multi-battery system, offering you maximum flexibility. By simply changing the battery adapter, you can use batteries from various manufacturers with your light, such as those from battery alliances like AMP or CAS, and many more. (Find more details in the KRAFTWERK webshop under item 702.006.500)

Operating the Display for Colour and Brightness Settings

Brightness (Lumen) Adjustment
Press the power button to adjust the lumen output

- 1x : 500 Lumens
- 2x : 1500 Lumens
- 3x : 2500 Lumens
- 4x : 5000 Lumens

Color Temperature (Kelvin) Adjustment
Press the COLOR button to adjust the Kelvin color temperature

- 1x : 2700K
- 2x : 3500K
- 3x : 4500K
- 4x : 5500K
- 5x : 6500K

Tripod for Your Work Light and installation (Optional Accessory)

To optimally expand the application range of your KRAFTWERK work light and enable flexible illumination of large areas, a specially developed tripod (sold separately) is available.
Item No. 702.798.003

- Maximum height: 1880 mm for wide-area illumination.
- Folded dimensions (transport size): 950 mm for easy transport and space-saving storage.
- Robust construction: Three legs ensure the lamp stands stably.

1. Fully extend the tripod until the legs are stable and locked into place. Make sure you place it on a firm and level surface.
2. Place the KRAFTWERK work light onto the designated mounting plate of the tripod. Ensure the lamp's bracket is correctly aligned with the tripod mount.
3. Securely fasten the lamp to the tripod by screwing it onto the mounting plate until it's firmly attached.





Waste electrical products should not be disposed of together with household waste. Please recycle where designated facilities exists. Check with your local authority or retailer for recycling advice.

- The battery must be removed from the appliance before it is scrapped.
- The appliance must be disconnected from the main power supply when removing the battery.
- The battery must be disposed of safely.

CE

Conforms to the relevant safety standards of the EU directives. All tools must be checked for damage

DECLARATION OF CONFORMITY

Item: 702.006.500
LED work lamp 5000, replaceable battery, 5 color temperature

KRAFTWERK Group AG confirms through applying of the CE marking, that the products marked with CE on the packaging or label correspond to the product-specific directives of EU.

The following product covers the requirements of the EC DECLARATION OF CONFORMITY regarding the ensure compliance of safety and health in accordance with machinery safety directives 2014/30/EU

EN IEC 55015:2019+A11
EN IEC 61547:2023

Guarantee

- We do not take responsibility for any damage caused by misuse or any use that is not in compliance with the safety standards described herein.
- From date of purchase receipt 2 year guarantee on material or production defects.

KRAFTWERK®

FAVORITE TOOLS SINCE 1979

KRAFTWERK Group AG
Mettlenbachstrasse 23
CH-8617 Mönchaltorf
Switzerland
Tel. +41-44 949 40 50

KRAFTWERK Sarl.
25, rue du Stade
F - 67870 Bischoffsheim
France
Tel. +33-388 48 64 50

www.kraftwerktools.com