KRAFTWERK®


FAVORITE TOOLS SINCE 1979


EN


Instruction Manual


LED work light 6000 with 5 colour temperatures and tripod


702.005.600















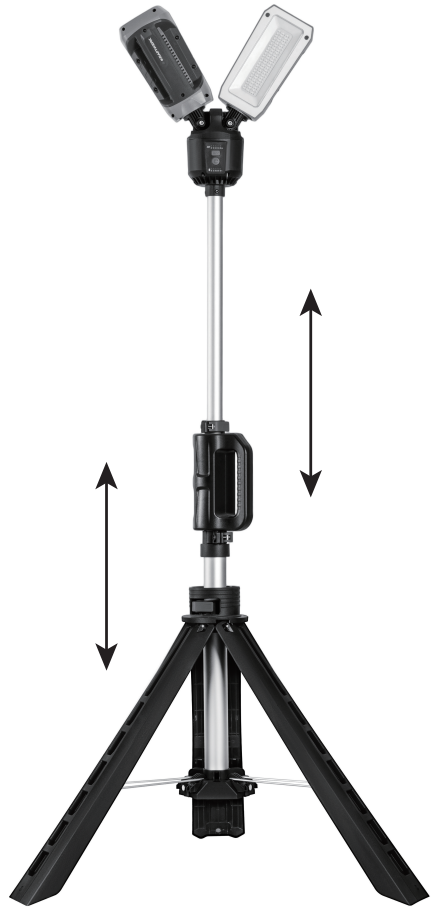

	Width(mm)	Height(mm)	Length(Min)(mm)
Fold	142	142	1200
Exted	850	850	2240

IMPORTANT! RETAIN FOR FUTURE REFERENCE: READ CAREFULLY!

TECHNICAL SPECIFICATIONS:

Model	**702.005.600**
Protection class	**III**
Protection degree	**IP65**
Optional adaptor input	100-240 V~ 50 / 60 Hz
Optional adaptor output	**20 V ⎓ 1.1**A
Illuminant	**45W SMD LED**
Luminous flux	**6000lm(45W) ,2400m(20W), 1200lm(10W),600lm(5W)**
Kelvin	**2700K , 3500K ,4500K , 5500K , 6500K**
Charging time	**5 h**
Operating time	**2.0h(45W),4.0h(20W),8.0h(10W),16h(5W)**
Battery	**Li-ion 14.8 V ⎓ 5200 mAh**
Operating temperature	-10°C ~ +40°C
Dimensions L/W/H	**142 x 14 2x 1200 mm**
Net weight	**4400 g**

PROPER INTENDED USE

The handlamp is suitable for indoor and outdoor lighting applications.

WARNING / CHARGING INSTRUCTION / BATTERY TIPS

- Avoid looking directly into the beam of light, as this will result in dazzling
- Do not use the lamp near a naked flame
- Before using the lamp for the first time, the battery must be fully charged
- Use only the original charging cable that came with the product
- Please do not use a modified or damaged charger
- Recharge frequently
- Please do not leave the lamp be in charging over 24 hours
- Always replace the battery with an original battery
- Do not leave the battery without charge for an extended period
- Deep discharge risks damaging the battery
- The light source of this lamp is not replaceable; when the light source reaches its end of life the whole lamp shall be replaced

CLEANING

Do not use solvents, corrosive cleaners or the like. Use a dry or slightly moist cloth for cleaning ONLY.



Waste electrical products should not be disposed of together with household waste. Please recycle where designated facilities exists. Check with your local authority or retailer for recycling advice.

- The battery must be removed from the appliance before it is scrapped.
- The appliance must be disconnected from the main power supply when removing the battery.
- The battery must be disposed of safely.

CE

Conforms to the relevant safety standards of the EU directives. All tools must be checked for damage

DECLARATION OF CONFORMITY

Item: 702.005.600
LED work light 6000 with 5 colour temperatures and tripod

KRAFTWERK Group AG confirms through applying of the CE marking, that the products marked with CE on the packaging or label correspond to the product-specific directives of EU.

The following product covers the requirements of the EC DECLARATION OF CONFORMITY regarding the ensure compliance of safety and health in accordance with Electromagnetic Compatibility 2014/30/EU

EN IEC 55015:2019+A11
EN 61547:2023

Guarantee

- We do not take responsibility for any damage caused by misuse or any use that is not in compliance with the safety standards described herein.
- From date of purchase receipt 2 year guarantee on material or production defects.

KRAFTWERK®

FAVORITE TOOLS SINCE 1979

KRAFTWERK Group AG
Mettlenbachstrasse 23
CH-8617 Mönchaltorf
Switzerland
Tel. +41-44 949 40 50

KRAFTWERK Sarl.
25, rue du Stade
F - 67870 Bischoffsheim
France
Tel. +33-388 48 64 50

www.kraftwerktools.com